

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	GRILL	GAS	NEGVG94

DESCRIPTION

GAS GRILL 80 CM



TECHNICAL DATA:

STRUCTURE	FLOOR	NR. COOKING ZONES	2
WIDTH	800 mm	GRILL DIMENSIONS	627x710 mm
DEPHT	900 mm		
HEIGHT	900 mm		
NET WEIGHT	121 kg		
VOLUME	0.6 m3		
GAS POWER	22 kW		

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	GRILL	GAS	NEGVG94

FEATURES:

Gas Grill Monoblock unit, two cooking zones. Stainless steel top (AISI 304) thickness 20/10, pre-fitted for head-to-head connection. Reversible cast iron grid. Tilting forward for cooking fatty meats, with 4 mm elements in direct contact and drip tray for collecting grease. Horizontal grid for fish and vegetables, elements with circular design diam. 10 mm. Splashback up-stand on three sides, height 13.5 cm, made of stainless steel AISI 304. Fat drain channel in the front, easily removable for cleaning. Removable tray for grease and water positioned underneath the heating elements. Grease is cooled down by water. The water then evaporates and cooks the food gently. Control unit placed on the fixed front panel. Heating by means of stainless steel burner (Aisi 304) placed under the cooking grid, protected by a stainless steel diffuser (Aisi 316), easily removable for cleaning. Heat adjustment via safety tap with thermocouple and pilot burner. Piezoelectric ignition. Height-adjustable feet in stainless steel. Scraper for grid included.


OPTIONAL ACCESSORIES:

• CAST IRON GRID KIT FOR 800 MM MODULE

GGL94

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	GRILL	GAS	NEGVG94

INSTALLATION SCHEME

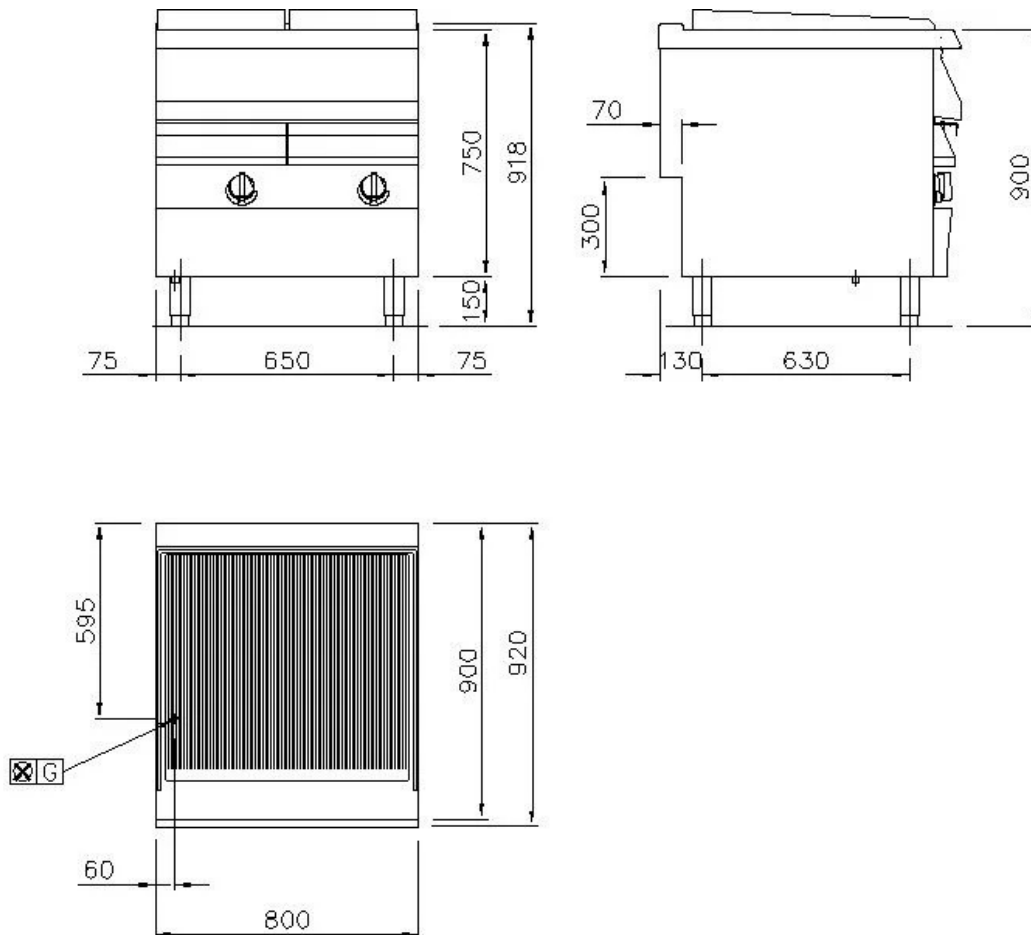

	E1	SOCKET
	AF	COLD WATER
	AC	HOT WATER
	G	GAS
	S	DRAINING

Ø 1/2" 100 mm

NOTES FOR THE INSTALLER:

All water and gas connections must be fitted with a shut-off valve or ball valve. Main gas connections must be provided of closing gate device.

Gas connections must not use welded tubes.

Gas connections must be jacketed according to current rules in the country.

Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).

All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug. All electric connections must be provided of main switch.

The specification shown in this document are to be considered not bounding.

The company reserves the right to make technical changes at any moment.