

SERIES	PRODUCT FAMILY	VERSION	MODEL
<b>650</b>	<b>CERAMIC PLATE</b>	<b>ELECTRIC</b>	<b>ECV64EVP</b>

## DESCRIPTION

EL. RANGE CERAMIC TOP 4 ZONES HIGH POWER  
ON EL. CONVECTION OVEN



## TECHNICAL DATA:

STRUCTURE	ON FAN ELECTRIC OVEN	OVEN POWER	4.2 kW
WIDTH	700 mm		
DEPHT	650 mm		
HEIGHT	850 mm		
NET WEIGHT	80 kg		
VOLUME	0.73 m3		
ELECTRIC POWER	14.2 kW		
PHASE	3N		
FREQUENCY	50/60 Hz		
VOLTAGE	400 V		

SERIES	PRODUCT FAMILY	VERSION	MODEL
<b>650</b>	<b>CERAMIC PLATE</b>	<b>ELECTRIC</b>	<b>ECV64EVP</b>

## FEATURES:

Monoblock cooking range Series SNACK, high performance, ceramic cook top with 4 independent cooking zones. The cooking zones are framed by silkscreened circles on the ceramic surface and equipped with a signal light for residual heat. Four independent cooking zones: 4 x 2,5 kw Ø22cm. Electric convection oven (57x49x29.5h). Heating by means of by independently controlled top and bottom heating elements. Thermostat to adjust the temperature within a setting range from 50°C to 300°C. Cooking chamber made of stainless steel. Oven bottom AISI 430 th. 30/10. 4-position selector switch, safety thermostat. Signal light to check whether the appliance is operating correctly. Power rating 4.2 kW. Appliance equipped with height-adjustable stainless steel feet.




## STANDARD ACCESSORIES:

## OPTIONAL ACCESSORIES:

• STAINLESS STEEL OVEN GRID	C70XGRFVS
• STAINLESS STEEL TRAY	C70XTFVS

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	CERAMIC PLATE	ELECTRIC	ECV64EVP

## INSTALLATION SCHEME

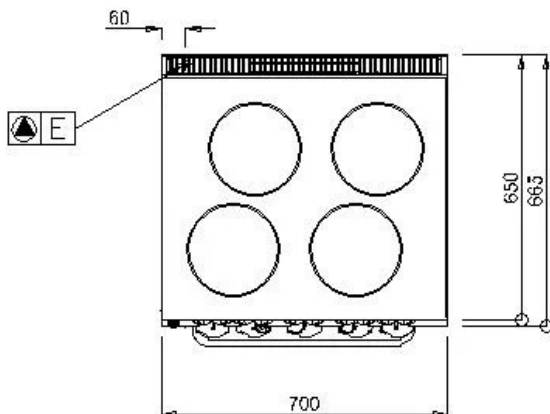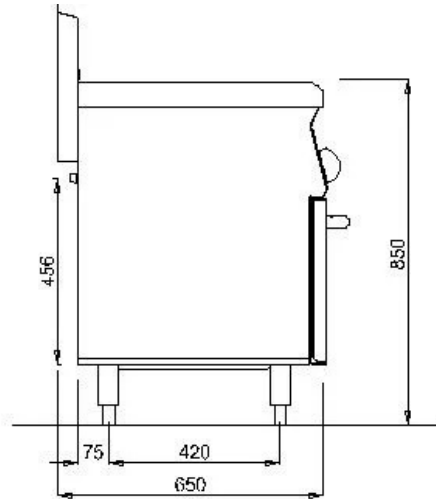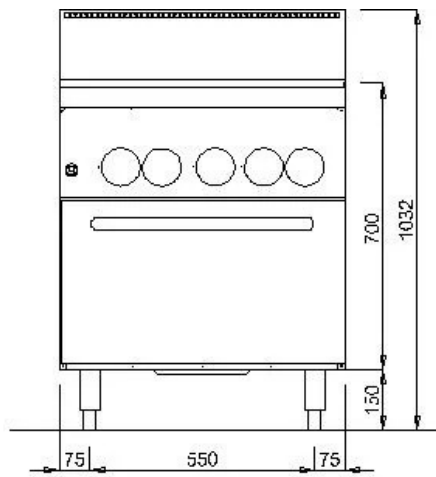

	SOCKET	400 V	3N
	COLD WATER		
	HOT WATER		
	GAS		
	DRAINING		

### NOTES FOR THE INSTALLER:

All water and gas connections must be fitted with a shut-off valve or ball valve. Main gas connections must be provided of closing gate device.

Gas connections must not use welded tubes.

Gas connections must be jacketed according to current rules in the country.

Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght ( except where otherwise required in the drawing).

All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.

All electric connections must be provided of main switch.

The specification shown in this document are to be considered not bounding.

The company reserves the right to make technical changes at any moment.