

SERIES	PRODUCT FAMILY	VERSION	MODEL
<b>1100</b>	<b>GRILL</b>	<b>GAS</b>	<b>NEGP4G</b>

## DESCRIPTION

1 SIDE OPERATION ELECTRIC GRILL ON PASS-THROUGH OPEN BASE



## TECHNICAL DATA:

STRUCTURE	OPEN BASE	NR. COOKING ZONES	3
WIDTH	900 mm	GRILL DIMENSIONS	730x535 mm
DEPHT	1100 mm		
HEIGHT	870 mm		
NET WEIGHT	101 kg		
VOLUME	0.9 m3		
GAS POWER	24 kW		

SERIES	PRODUCT FAMILY	VERSION	MODEL
<b>1100</b>	<b>GRILL</b>	<b>GAS</b>	<b>NEGP4G</b>

## FEATURES:



Gas grill, depth 1100, controls on one side, on open compartment with 3 cooking zones, made of AISI 304 stainless steel. Worktop thickness 20/10. The cooking grill can be positioned on two levels to ensure optimum grilling. Cooking surface mm 730x535. The grill is equipped with a removable grease collection tray for easy cleaning. Heating by means of 3 cast-iron burners with double row of flames, arranged every 22.2 mm of the grill, protected by cast-iron radiant elements that ensure a high thermal flywheel. Heating control via safety tap with thermocouple. Knob for heating control with protective geometry against water penetration. Heating management controlled by a tap with safety valve. Cast-iron grill supplied. Appliance equipped with height-adjustable stainless steel feet.

## OPTIONAL ACCESSORIES:

• Door 450 mm	NKBVP1145
• NR. 4 FEET H 50MM	NXPZM

SERIES	PRODUCT FAMILY	VERSION	MODEL
<b>1100</b>	<b>GRILL</b>	<b>GAS</b>	<b>NEGP4G</b>

## INSTALLATION SCHEME

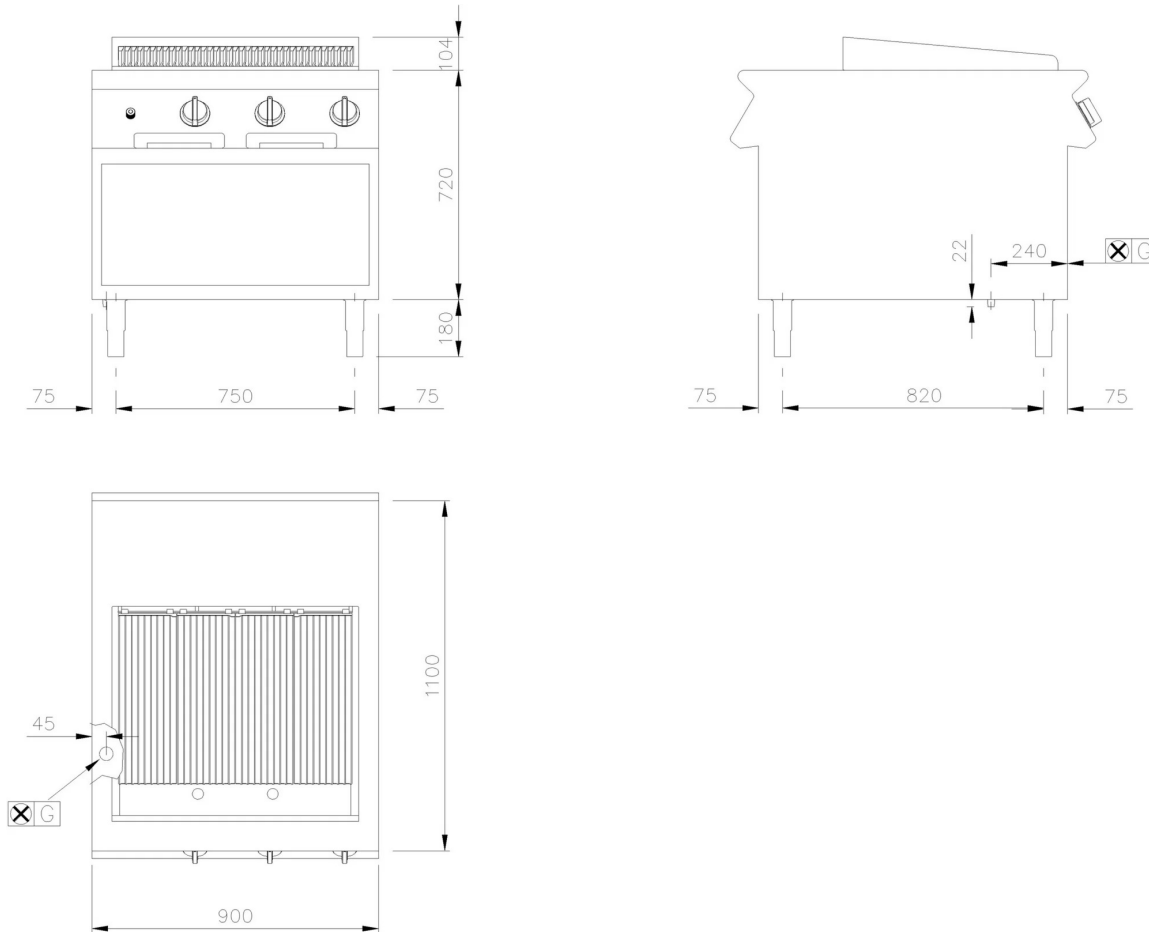

Ø 1/2"

### NOTES FOR THE INSTALLER:

All water and gas connections must be fitted with a shut-off valve or ball valve. Main gas connections must be provided of closing gate device.

Gas connections must not use welded tubes.

Gas connections must be jacketed according to current rules in the country.

Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght ( except where otherwise required in the drawing).

All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug. All electric connections must be provided of main switch.

The specification shown in this document are to be considered not bounding.

The company reserves the right to make technical changes at any moment.

SILKO ALI Group Srl  
 Uff. Commerciali:  
 Via F. Marinotti 45  
 31029 Vittorio Veneto (TV) ITALY  
 Tel. (+39) 0438 911930  
 C.F. e Pl. 13239980967

Sede Second. E Uff. Amm.vi:  
 Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia  
 31029 Vittorio Veneto (TV) - ITALY  
 Tel. (+39) 0438 91110

Capitale Sociale € 20.000.000 I.V.  
 Società a Socio Unico  
 Sede Legale: Via Gobetti, 2/A – 20063 Cernusco sul Naviglio (MI)  
 REA MI2711267- Registro Imprese Milano  
 www.silko.it - E-mail: info@silko.it