

SERIES 700 PRODUCT FAMILY **INDUCTION PLATE** MODEL **NECI72C**

DESCRIPTION

ELECTRIC RANGE INDUCTION TOP 2 ZONES ON MODULE WITH DRAWER



TECHNICAL DATA:

| | | | |
|----------------|-------------|-------------------|------------|
| STRUCTURE | WITH DRAWER | PLATE SIZE | 350x570 mm |
| WIDTH | 400 mm | NR. COOKING ZONES | 2 |
| DEPHT | 730 mm | | |
| HEIGHT | 900 mm | | |
| NET WEIGHT | 47.5 kg | | |
| VOLUME | 0.26 m3 | | |
| ELECTRIC POWER | 7 kW | | |
| PHASE | 3 | | |
| FREQUENCY | 50/60 Hz | | |
| VOLTAGE | 400 V | | |

| | | |
|------------|------------------------|----------------|
| SERIES | PRODUCT FAMILY | MODEL |
| 700 | INDUCTION PLATE | NECI72C |


FEATURES:

Electric Range with induction top, Monoblock unit on base with incorporated drawer. Top plate in stainless steel AISI 304, thickness 15/10, pre-fitted for head-to-head connection, ceramic top thickness 6 mm sealed to the top plate, the pot detection system activates heating as soon as a cooking pot is placed upon the cook top. Equipped with 2 independent cooking zones of 3.5 kW. Cooking zones are framed by silkscreened circles on the ceramic surface. Selector switch with 10 power settings. Indicator lights signal heating activation and that the appliance is operating correctly. Incorporated Power-Box, main safety sensor. Pre-fitted for floor or wall mounting. Height-adjustable feet in stainless steel.

OPTIONAL ACCESSORIES:

SERIES 700 PRODUCT FAMILY INDUCTION PLATE MODEL NECI72C

INSTALLATION SCHEME

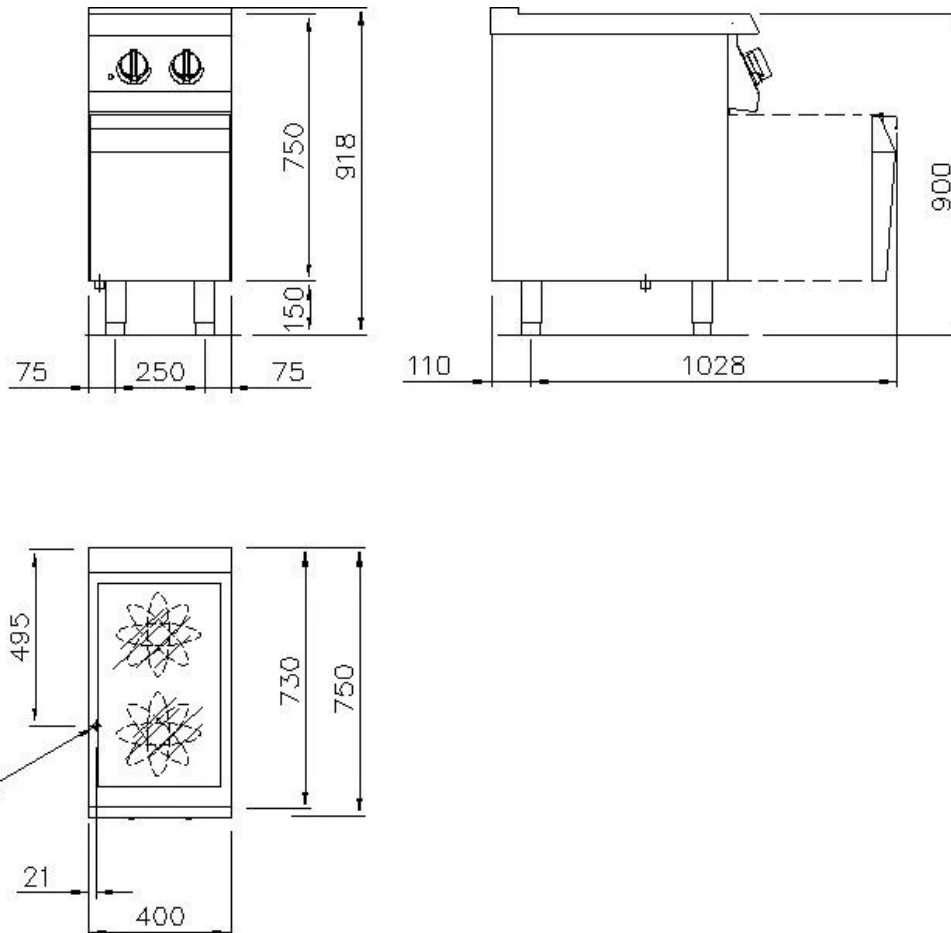

| | | | |
|--|------------|-------|---|
| | SOCKET | 400 V | 3 |
| | COLD WATER | | |
| | HOT WATER | | |
| | GAS | | |
| | DRAINING | | |

NOTES FOR THE INSTALLER:

All water and gas connections must be fitted with a shut-off valve or ball valve. Main gas connections must be provided of closing gate device.

Gas connections must not use welded tubes.

Gas connections must be jacketed according to current rules in the country.

Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).

All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.

All electric connections must be provided of main switch.

The specification shown in this document are to be considered not bounding.

The company reserves the right to make technical changes at any moment.