

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	GRIDDLES	ELECTRIC	NEBE94GLC

DESCRIPTION

ELECTRIC FRY TOP 80 CM SMOOTH CHROMED ON OPEN MODULE



TECHNICAL DATA:

STRUCTURE	OPEN BASE	PLATE SIZE	735x700 mm
WIDTH	800 mm	NR. COOKING ZONES	2
DEPHT	900 mm		
HEIGHT	900 mm		
NET WEIGHT	132 kg		
VOLUME	0.9 m3		
ELECTRIC POWER	15 kW		
PHASE	3N		
FREQUENCY	50/60 Hz		
VOLTAGE	400 V		

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	GRIDDLES	ELECTRIC	NEBE94GLC

FEATURES:


Electric Fry-Top, two cooking zones with smooth, tilted and chromed hotplate, Monoblock unit on open base. Cook top made of stainless steel AISI 304, thickness 20/10, pre-fitted for head-to head connection. Hotplate lowered 4 cm compared to worktop, sealed and welded for easy cleaning. Satin finish cooking surface, 6.5 cm cooling zone in the front part of the hotplate. Round grease drain hole, diam. 4 cm. Fat tray with a capacity of 2.5 lt. Heating by means of shielded electrical INCOLOY resistances. A signal light on the control panel switches on when heating is activated. Cooking temperature check occurs thermostatically within a temperature range of 110° to 280 ° C. Should the working thermostat cause problems the safety thermostat switches on. Cooking surface 74.5x70 cm. Height-adjustable feet in stainless steel. Scraper for cooking plate included.

OPTIONAL ACCESSORIES:

• SCRAPER FOR FRY TOP	RBLR
• PLATE CLEANING CAP	KFTT
• SPLASHBACK 800	KFTP81

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	GRIDDLES	ELECTRIC	NEBE94GLC

INSTALLATION SCHEME

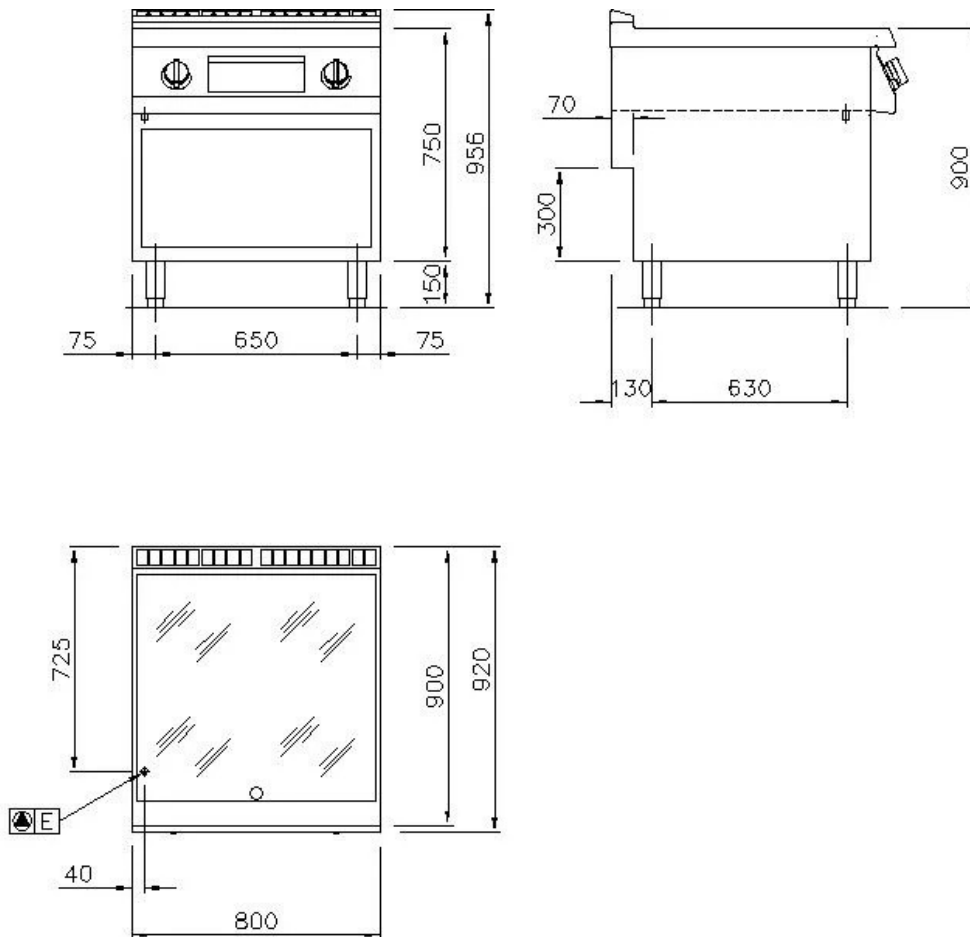

	SOCKET	400 V	3N
	COLD WATER		
	HOT WATER		
	GAS		
	DRAINING	Ø 40 mm	

NOTES FOR THE INSTALLER:

All water and gas connections must be fitted with a shut-off valve or ball valve. Main gas connections must be provided of closing gate device.

Gas connections must not use welded tubes.

Gas connections must be jacketed according to current rules in the country.

Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter length (except where otherwise required in the drawing).

All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.

All electric connections must be provided of main switch.

The specification shown in this document are to be considered not bounding.

The company reserves the right to make technical changes at any moment.