

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	WARM CONTAINER	ELECTRIC	NERP92G

DESCRIPTION

WARM CONTAINER 40 CM ON OPEN MODULE



TECHNICAL DATA:

STRUCTURE	OPEN BASE	WELL CAPACITY	25 LT.
WIDTH	400 mm	WELL DIMENSIONS	GN 1/1 mm
DEPHT	900 mm		
HEIGHT	900 mm		
NET WEIGHT	47 kg		
VOLUME	0.3 m3		
ELECTRIC POWER	2 kW		
FREQUENCY	50/60 Hz		
VOLTAGE	230 V		

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	WARM CONTAINER	ELECTRIC	NERP92G


FEATURES:

Electric Chip Scuttle, Monoblock unit on open base. Cook top made of stainless steel AISI 304, thickness 20/10, pre-fitted for head-to head connection. Heating by means of lower electrical resistance with temperature setting range from 30°C to 90°C. Upper infrared heating with On/Off switch. Container GN 1/1 h=15 cm. Height-adjustable feet in stainless steel.

OPTIONAL ACCESSORIES:

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	WARM CONTAINER	ELECTRIC	NERP92G

INSTALLATION SCHEME

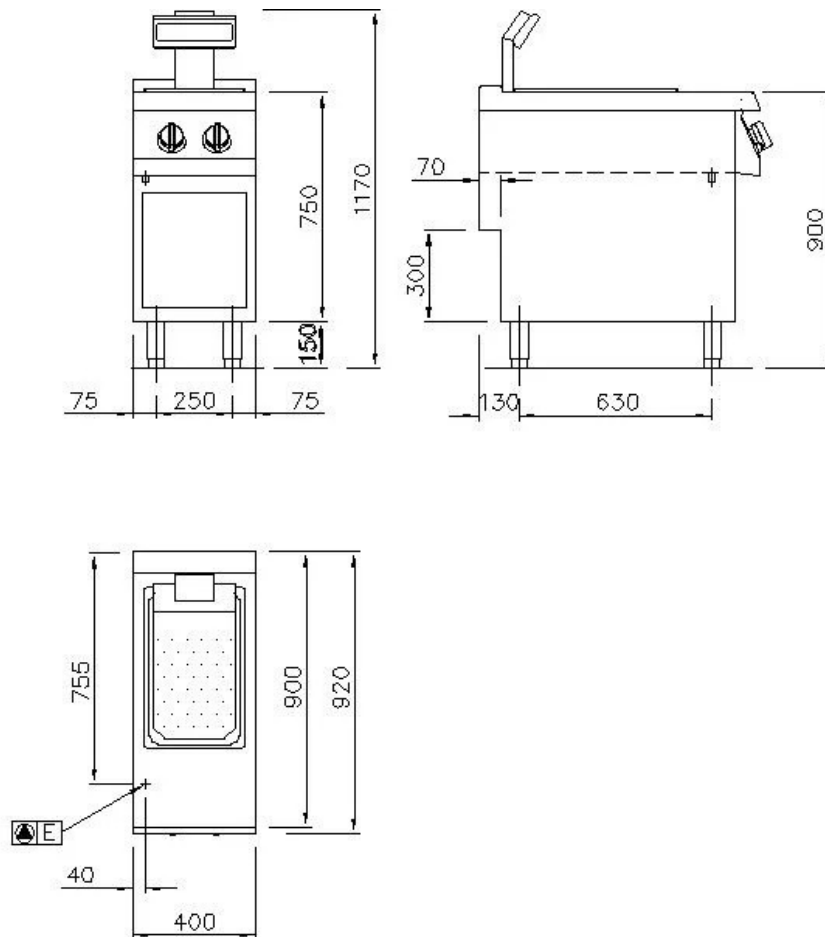

	SOCKET	230 V
	COLD WATER	
	HOT WATER	
	GAS	
	DRAINING	

NOTES FOR THE INSTALLER:

All water and gas connections must be fitted with a shut-off valve or ball valve. Main gas connections must be provided of closing gate device.

Gas connections must not use welded tubes.

Gas connections must be jacketed according to current rules in the country.

Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).

All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.

All electric connections must be provided of main switch.

The specification shown in this document are to be considered not bounding.

The company reserves the right to make technical changes at any moment.